






Straight Type



Surface Mount Type

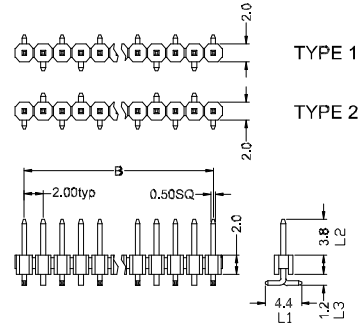

Right Angle Type

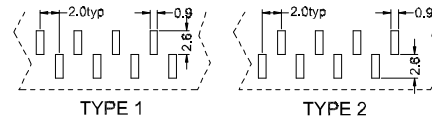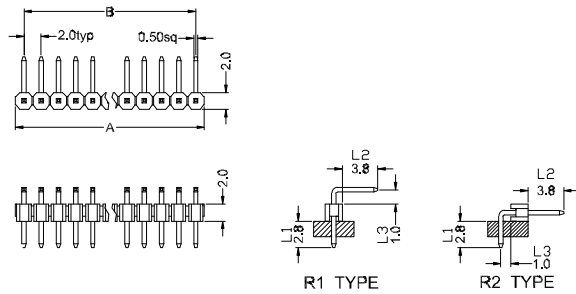

材质 Material:

绝缘体 Insulator: Glass filled PBT UL94V-0 ,Black
 接触件 Contacts: Brass
 电镀层 Plating:Whole Gold plated over Nickel

电气性能 Electrical Characteristics:

接触电阻 Contact Resistance: 30mΩmax. at DC 100mA
 绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC
 耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute
 工作电流 Current Rating: 2 AMP

使用温度范围 Operating Temperature: -55°C~+105°C

Position	1 Thru 40
Dimension	
A±0.20	2.00 X No.of Positions
B±0.15	2.00 X No.of Positions -2.00

				TITLE	PIN HEADER 2.0mm 2.0单排插针		GENERAL TOLERANCE	DRAWN BY	DATE	CHIZON CHIZON(CI XI) ELECTRONIC CO.,LTD. 啓宸(慈溪)电子有限公司					
				SERIES	QC503-1		x. : ±0.3 x.x: ±0.2 x.xx: ±0.1	CHECKED BY	DATE					張國校	
				CUSTOMER P/N			ANGLE TOLERANCE	APPROVED BY	DATE						
SCALE	DESCRIPTION	CHK	DATE	UNITS	mm	PROJECTION	x. : ±2° x.x: ±1° x.xx: ±0.5°			DRAWING NO.		SHEET	1 OF 1		
				SCALE	1:1					SHEET SIZE	A4	REV.	AO		